
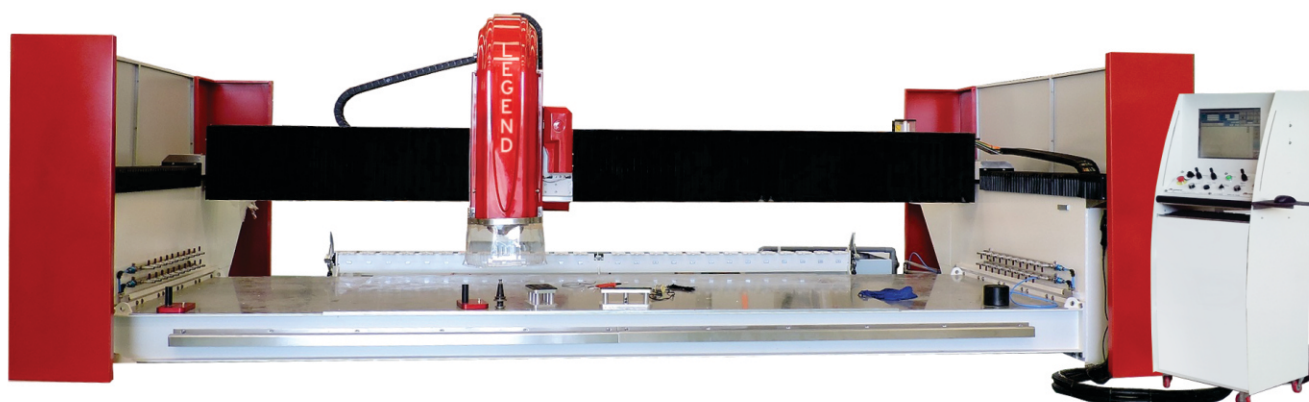



LEGEND

Ideal for large benchtops




A full table, 3 Axis CNC work centre, to value add all your benchtop works.

The LEGEND is a simple cost efficient machine that can take a full slab and can do your undermount cutouts, drill holes, drain grooves, flat drain board recess, outside edge profile work, shaping and polishing using the appropriate tooling, engraving and all other functions that might be relevant to today's benchtop manufacturing.


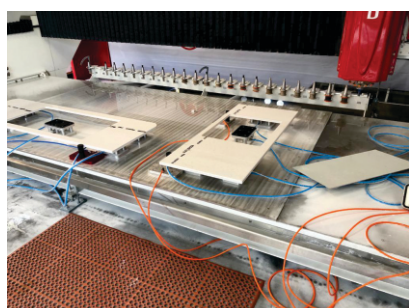


Being of a monolithic design, it is easy to lift into place and commissioned, giving more time for the technician to spend instructing the operator. Our simple to use pre-written programming is stone mason friendly and consists of all commonly used sinks in an easy to read menu, as well as a second parametric program for uncommon generic sinks. New requests by customers has enabled our design department to write specialized programs such as bathtub surrounds and large island benchtops with curved sides. The machine is also capable to be used as a normal CNC for the well versed operator, using CAD-CAM programming.


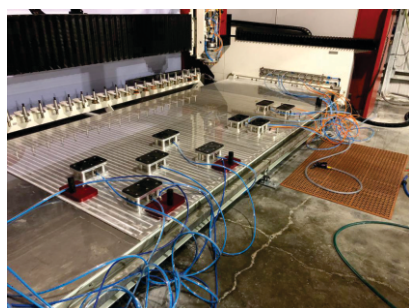


LEGEND

Ideal for large benchtops

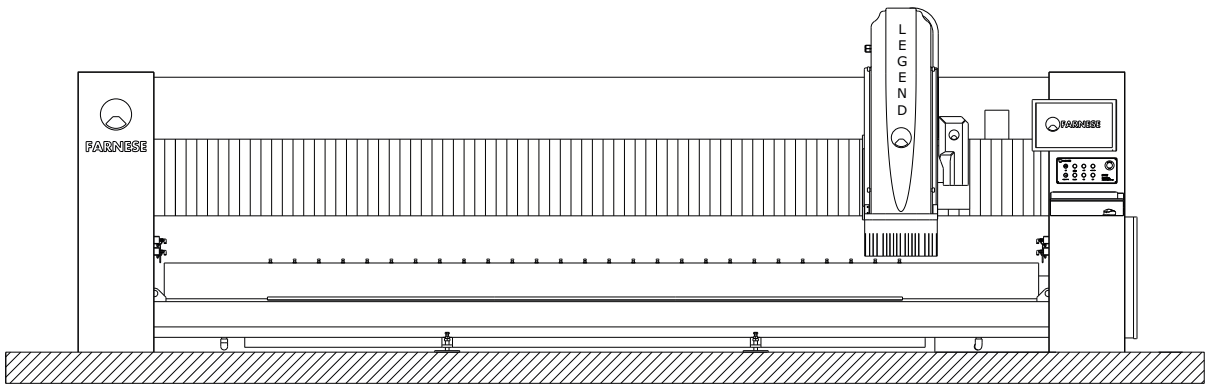

TECHINICAL SPECIFICATIONS

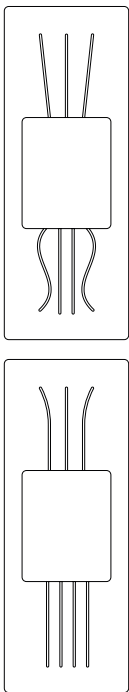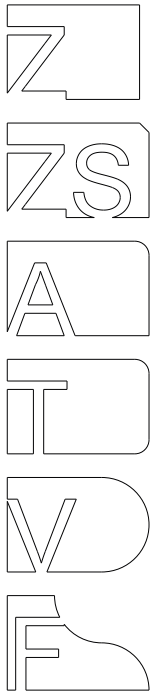

DIMENSIONS OF INSTALLED MACHINE		METRIC		IMPERIAL	
WIDTH		7000	mm	275.6	in
DEPTH		5300	mm	208.7	in
HEIGHT		2500	mm	98.4	in
WEIGHT		5000	kg	11000.0	lb

MAX SIZE OF SLAB		METRIC		IMPERIAL	
WIDTH		5000	mm	196.9	in
DEPTH		2200	mm	86.6	in

FEATURES & FEEDS		METRIC		IMPERIAL	
X STROKE (CROSS TRAVEL STROKE)		4000	mm	157.5	in
Y STROKE (LONG TRAVEL STROKE)		2000	mm	78.7	in
Z STROKE (HEAD UP AND DOWN)		300	mm	11.8	in
AIR PRESSURE (WORKING)		7	bar	102	psi
AIR PRESSURE (CONSUMPTION)		350	l/min	92.5	gpm
WATER (CONSUMPTION)	Clear	6.5	l/min	1.7	gpm
	Recycled	50	l/min	13.2	gpm
MAGAZINE		YES 26 POS		YES 26 POS	
VACUUM CUPS		YES		YES	
VACUUM GENERATOR		YES		YES	
BACK CAMPS		NO		NO	
FRONT CLAMPS		NO		NO	
AUTOMATIC GREASING		YES		YES	
LASER CUTTING GUIDE		YES		YES	
MICROSOFT WINDOWS COMPATIBLE		YES		YES	
AUTOMATIC TOOL CHANGER		YES		YES	
HANDWHEEL		YES		YES	
MAIN SPINDLE POWER		15	kW	20	hp
MAIN SPINDLE SPEED (MIN & MAX)		4500-10000	rpm	4500-10000	rpm
POWER REQUIRED		400V 3ph 50Hz		208V 3ph 60Hz	
		30A+ Neutral		60A	

*CONNECTIONS REQUIRED (SUPPLIED BY CUSTOMER)

POWER, WATER, COMPRESSED AIR.

*TOOLING | CONSULT YOUR LOCAL FARNESE DEALER FOR ANY TOOLING REQUIRED.



www.farnese.com.au

Owing to the constant updating of our designs, descriptions and technical data shown in our drawings and folders are not binding.
Possible alterations deemed by the makers as convenient will be effected at any time without previous notice.