
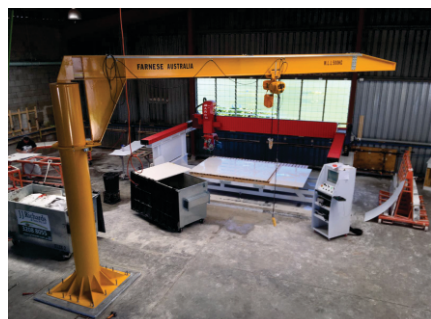


# JIB CRANE 360

Make your lifting needs easier



The JIB CRANE 360 is one of the most important elements in any mason's work shop.



It composed of a single round column and a swinging arm made from a steel I beam. The JIB CRANE 360 is designed to be bolted directly to the ground thanks to a large base plate. This base plate is anchored to the ground by bolts which are chemically set to a levelled concrete floor which must be at least 150mm in thickness.

The JIB CRANE 360 is fitted with a motorized chain hoist; the two speed motor enables the operator to manoeuvre the hoist with ease and accuracy in an up down motion.


An isolation switch has been installed as a safety feature which will be essential for the connection of power to the JIB CRANE 360.

# JIB CRANE 360

Make your lifting needs easier

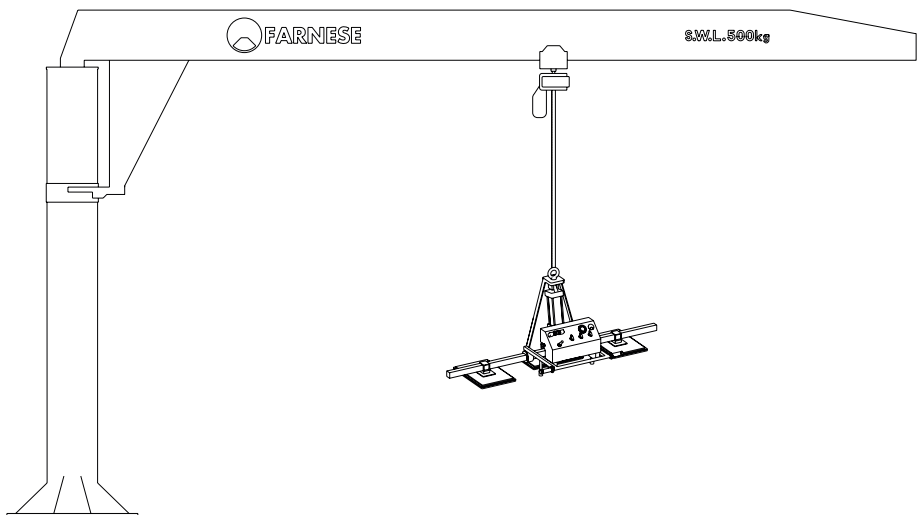

## TECHINICAL SPECIFICATIONS



DIMENSIONS OF INSTALLED EQUIPMENT	METRIC	IMPERIAL
WIDTH	7300 mm	287.4 in
DEPTH	1100 mm	43.3 in
HEIGHT	4000 mm	157.5 in
WEIGHT	900 kg	1980.0 lb
LOAD (SAVE WORKING LIMIT)	500 kg	1100.0 lb

EQUIPMENT RANGES		
ARM RANGE (MAX FROM THE CENTRE)	6765 mm	266.3 in
ARM RANGE (MIN FROM THE CENTRE)	1050 mm	41.3 in
FIRST JOINT	0-360°	0-360°
HOIST WITH REMOTE CONTROL	YES	YES
POWER REQUIRED	400V 3ph 50Hz	208V 3ph 60Hz
	3A + Neutral	5A

\*CONNECTIONS REQUIRED (SUPPLIED BY CUSTOMER)

POWER, WATER, COMPRESSED AIR.

\*CUSTOM SIZES AVAILABLE ON REQUEST

\*VACUUM LIFTER SHOWN FOR ADVERTISING PURPOSES

\*FARNESE DO NOT SUPPLY ROIS AND CHEMICAL -SETS



[www.farnese.com.au](http://www.farnese.com.au)

Owing to the constant updating of our designs, descriptions and technical data shown in our drawings and folders are not binding.  
Possible alterations deemed by the makers as convenient will be effected at any time without previous notice.